

VICTORIA THEATER

233 W. 125TH STREET,
NEW YORK, NY 10027

BLOCK: 1931

LOT: 17

DEVELOPER:
Danforth Development
Partners, LLC

115 W. 120TH STREET GARDEN LEVEL
NEW YORK, NY 10027
PH: 212 931-0740
FX: 212 931-0744

DESIGNER:
Exact Capital

100 PARK AVE. SUITE 1400
NEW YORK, NY 10017
DEVELOPER:
Lam Group

302 CENTRE STREET 6TH FLOOR
NEW YORK, NY 10013
PH: 212 274-3003
info@lamgroupnyc.com

DEVELOPER:
Harlem Community
Development Corporation

Adam Clayton Powell, J. State
Office Building
163 West 125th Street, 17th Floor
New York, NY 10027

ARCHITECT:
Aufgang Architects, LLC

49 NORTH ARMONT ROAD
SUFFERN, NEW YORK
PH: 845 368-0004
info@aufgang.com

STRUCTURAL:
Brooker Engineering PLLC

76 LAFAYETTE AVENUE
SUFFERN, NEW YORK
PH: 845 357-4411
FX: 845 357-1896

REGISTERED ELECTRICAL ENGINEERING:
Elfinger Engineering Associates
Consulting Engineers

305 86TH AVE., NEW YORK, NEW YORK
10021
PH: 212-244-2410
FX: 212-443-1606

AUFGANG ARCHITECTS

WALL TYPE LEGEND:

- NON RATED
- ▲ FURRING AT INTERIOR CONCRETE WALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD OVER 1/2" METAL CHANNELS @ 16" O.C.
 - ▲ TYPICAL PARTITION - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD ON EACH SIDE OF 2 1/2" METAL STUDS @ 16" O.C.
 - ▲ CHASE WALL PARTITION - (1) LAYER 5/8" TYPE "X" WATER RESISTANT GYPSUM BOARD ONE SIDE OF 3/8" METAL STUDS @ 16" O.C.
 - ▲ PARTITION - (1) LAYER OF 5/8" TYPE "X" GYPSUM BOARD ON EACH SIDE OF 3/8" METAL STUDS @ 16" O.C. (8' APARTMENT ELECTRICAL PANEL)
 - ▲ FURRING AT EXTERIOR WALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD ON 3/8" GALV. METAL FURRING @ 16" O.C. WITH 3/2" (R-5) BATT INSULATION UNFACED
 - ▲ FURRING AT EXTERIOR WALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD ON 1/2" GALV. METAL STUDS @ 16" O.C.
 - ▲ FURRING AT EXTERIOR WALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD ON 1/2" GALV. METAL STUDS @ 16" O.C. WITH 1/2" SEMI-RIGID INSULATION (R-5) UNFACED
 - ▲ PARTITION - (1) LAYER 1/2" GYPSUM BOARD ON EACH SIDE OF 1/2" GALV. METAL STUDS (20 GAUGE) @ 16" O.C. WITH 1/2" SEMI-RIGID INSULATION THERMAFIBER - VERSABOARD (MANUFACTURED BY OWENS CORNING) (R-5) UNFACED
 - ▲ FURRING AT INTERIOR MASONRY WALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD OVER 1/2" METAL CHANNELS @ 16" O.C.
- 1 HOUR RATED
- ▲ 1 HOUR RATED TENANT SEPARATION PARTITION - (1) LAYER OF 5/8" TYPE "X" GYPSUM BOARD ON EACH SIDE OF 3/8" METAL STUDS @ 16" O.C. WITH 3/2" SOUND ATTENUATION INSULATION EXTEND STUDS & GYPSUM BOARD UP TO UNDERSIDE OF CONCRETE DECK & SEAL TIGHT TO UNDERSIDE OF CONCRETE DECK AND/OR ROOF DECK W/ CONT. FIRESTOP SEALANT & FIRESAFING INSULATION (UL #419) (STC 51)
 - ▲ 1 HOUR RATED CHASEWALL - (1) LAYER 5/8" TYPE "X" GYPSUM BOARD ON ONE SIDE OF 2 1/2" METAL STUDS @ 16" O.C. EXTEND GYPSUM BOARD & STUDS UP TO UNDERSIDE OF FLOOR DECK OR ROOF DECK. SEAL TIGHT TO UNDERSIDE OF FLOOR/ROOF DECK W/ CONT. FIRESTOP SEALANT. (UL #442) (PROVIDE INSUL. AS REQ'D TO ACHIEVE A MIN STC RATING OF 50)
 - ▲ 1 HOUR RATED EXTERIOR PARTITION - (2) LAYERS OF 1/2" TYPE "X" GYPSUM BOARD (INSIDE) & EXP. EXTERIOR GYPSUM BOARD SHEATHING (OUTSIDE) OVER 3/8" GA 18 GALV. METAL STUDS @ 16" O.C. WITH 3/2" BATT INSULATION (UNFACED) (R-5) (UL #424)
- 2 HOUR RATED
- ▲ 2 HOUR RATED EXTERIOR PARTITION - (2) LAYERS OF 1/2" TYPE "X" GYPSUM BOARD (INSIDE) & EXP. EXTERIOR GYPSUM BOARD SHEATHING (OUTSIDE) OVER 3/8" GA 18 GALV. METAL STUDS @ 16" O.C. WITH 3/2" BATT INSULATION (UNFACED) (R-5) (UL #424)
 - ▲ 2 HOUR RATED INTERIOR PARTITION - (2) LAYERS 5/8" TYPE "X" GYPSUM BOARD ON EACH SIDE 3/8" METAL STUDS @ 16" O.C. WITH 3/2" SOUND ATTENUATION INSULATION. EXTEND GYPSUM BOARD & STUDS UP TO UNDERSIDE OF FLOOR DECK. SEAL TIGHT TO DECK W/ CONT. FIRESTOP SEALANT & FIRESAFING. (GA FILE UL #419-522 STC 55-59)
 - ▲ 2 HOUR RATED CMU WALL - CMU WITH CONT. GALVANIZED HORIZONTAL TRUSS TYPE REINFORCING AT ALTERNATE BLOCK COURSES. SEAL TOP OF CONCRETE BLOCK WALL TIGHT TO UNDERSIDE OF CONCRETE DECK OR DECK ABOVE WITH CONT. FIRESTOP SEALANT AND FIRESAFING INSULATION WHERE GAP EXISTS BETWEEN TOP OF WALL AND BOTTOM OF DECK (UL #906)
 - ▲ 2 HOUR RATED MECHANICAL SHAFT WALL - (2) LAYERS OF 1/2" TYPE "X" GYPSUM BOARD ON ONE SIDE OF 2 1/2" METAL C-H STUDS @ 24" O.C. WITH (1) LAYER OF 1" TYPE "X" GYPSUM LINER PANEL ON SHAFT SIDE. W/ 1" MINERAL FIBER INSULATION IN CAVITY. SEAL TOP OF WALL TIGHT TO UNDERSIDE OF CONCRETE DECK W/ CONT. FIRESTOP SEALANT. (GA FILE UL #4095 (STC-45-46))
 - ▲ 2 HOUR RATED CHASEWALL (2 ROWS) (2) LAYER 5/8" TYPE "X" GYPSUM BOARD ON ONE SIDE OF 2 1/2" METAL STUDS @ 16" O.C. EXTEND GYPSUM BOARD & STUDS UP TO UNDERSIDE OF FLOOR DECK OR ROOF DECK. SEAL TIGHT TO DECK WITH CONT. FIRESTOP SEALANT. SEAL ALL PENETRATIONS THRU CHASEWALL WITH FIRESAFING INSULATION AND CONT. FIRESTOP SEALANT AS REQ'D (UL #442) (PROVIDE INSUL. AS REQ'D TO ACHIEVE A MIN STC RATING OF 50)
- 3 HOUR RATED
- ▲ 3 HOUR RATED WALL - (1) LAYER 1/2" TYPE "X" GYPSUM BOARD OVER 1/2" METAL HAT CHANNELS @ 24" O.C. OVER 2 HR RATED CONCRETE BLOCK WALL WITH CONT. GALVANIZED HORIZONTAL TRUSS TYPE REINFORCING AT ALTERNATE COURSES. SEAL TOP OF CONCRETE BLOCK WALL TIGHT TO UNDERSIDE OF CONCRETE FLOOR DECK ABOVE WITH CONT. FIRESTOP SEALANT AND FIRESAFING INSULATION WHERE A GAP EXISTS BETWEEN TOP OF WALL AND BOTTOM OF CONCRETE DECK. (UL #414) (PROVIDE STC RATINGS OF 50-54 COMPACTOR CHUTE FOR SHAFT ADJACENT TO DWELLING UNITS)

- ### LEGEND:
- CONCRETE FOUNDATION WALL
 - CONCRETE BLOCK WALL - 2HR FIRE RATED (U.O.N.)
 - GYPSUM BOARD PARTITION - SEE PLAN FOR SIZE
 - MASONRY VENEER
 - REMOVABLE KITCHEN BASE CABINET - 2'-6" WIDE X 2'-0" DEEP
 - PARTITION - SEE WALL TYPE LEGEND
 - HANDICAP ADAPTABLE APARTMENT UNIT
 - U.F.A.S. ACCESSIBLE EFFICIENCY UNIT (TOTAL 6 UNITS)
 - U.F.A.S. COMPLIANT (H.V.), EFFICIENCY UNIT - OUTFITTED FOR PEOPLE W/ HEARING OR VISUAL IMPAIRMENTS (TOTAL 2 UNITS)
 - CONCRETE COLUMN
 - 5'-0" DIAMETER CLEAR HANDICAP FLOOR TURNING SPACE
 - 11' FLOOR TURNING SPACE
 - 30' x 48' CLEAR FLOOR SPACE
 - FIRE RATED SHAFT WALL
 - WINDOW - SEE WINDOW SCHEDULE ON DWG. A-601
 - DOOR & FRAME - SEE DOOR SCHEDULE DRAWING A-600
 - CARBON MONOXIDE DETECTOR
 - EXIT LIGHT AND SIGN - CEILING MOUNTED
 - ELECTRICAL PANEL UNIT
 - SUSPENDED CEILING GYPSUM BOARD
 - VISUAL SIGNALING DEVICE / STROBE LIGHT - SEE ELEG. DWGS FOR LOCATIONS

- ### GENERAL NOTES:
- FOR KITCHEN AND TOILET ELEVATIONS SEE DRAWING A-510, A-511 & A-512.
 - S.C. SHALL COORDINATE SIZE & LOCATION OF ALL HVAC OPENINGS IN CONC. DECK WITH MECHANICAL DRAWINGS.
 - CONTRACTOR SHALL COORDINATE SIZE AND LOCATION OF ALL MASONRY OPENINGS AT ELEVATOR ENTRANCES WITH ELEVATOR VENDOR.
 - ALL ENLARGED PLAN DIMENSIONS ARE TAKEN FINISH TO FINISH (U.O.N.).

3RD FLOOR PLAN

DRAWING NO:
A-103.00

DOB ISSUE DATE: PROJECT NO: 1119


DRAWN BY: CHECKED BY: AA

SCALE: AS NOTED SHEET NO:

THIS DRAWING IS AN INSTRUMENT OF SERVICE AND SHALL REMAIN THE PROPERTY OF AUFGANG ARCHITECTS LLC. WHETHER EXECUTED OR NOT. THE DRAWING SHALL NOT BE USED FOR ANY OTHER PROJECT OR OTHER PROJECTS FOR ANY OTHER PROJECTS WITHOUT THE WRITTEN CONSENT OF AUFGANG ARCHITECTS LLC. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR OBTAINING ALL NECESSARY APPROVALS FROM THE CITY OF NEW YORK AND THE STATE OF NEW YORK. REPRODUCTION OR PUBLICATION IN ANY MANNER BY WHOMEVER OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF AUFGANG ARCHITECTS LLC IS PROHIBITED. TEL: 212-244-2410

ARCHITECT SEAL & SIGNATURE:

NYC DOB NUMBER: XXX XXX XXX

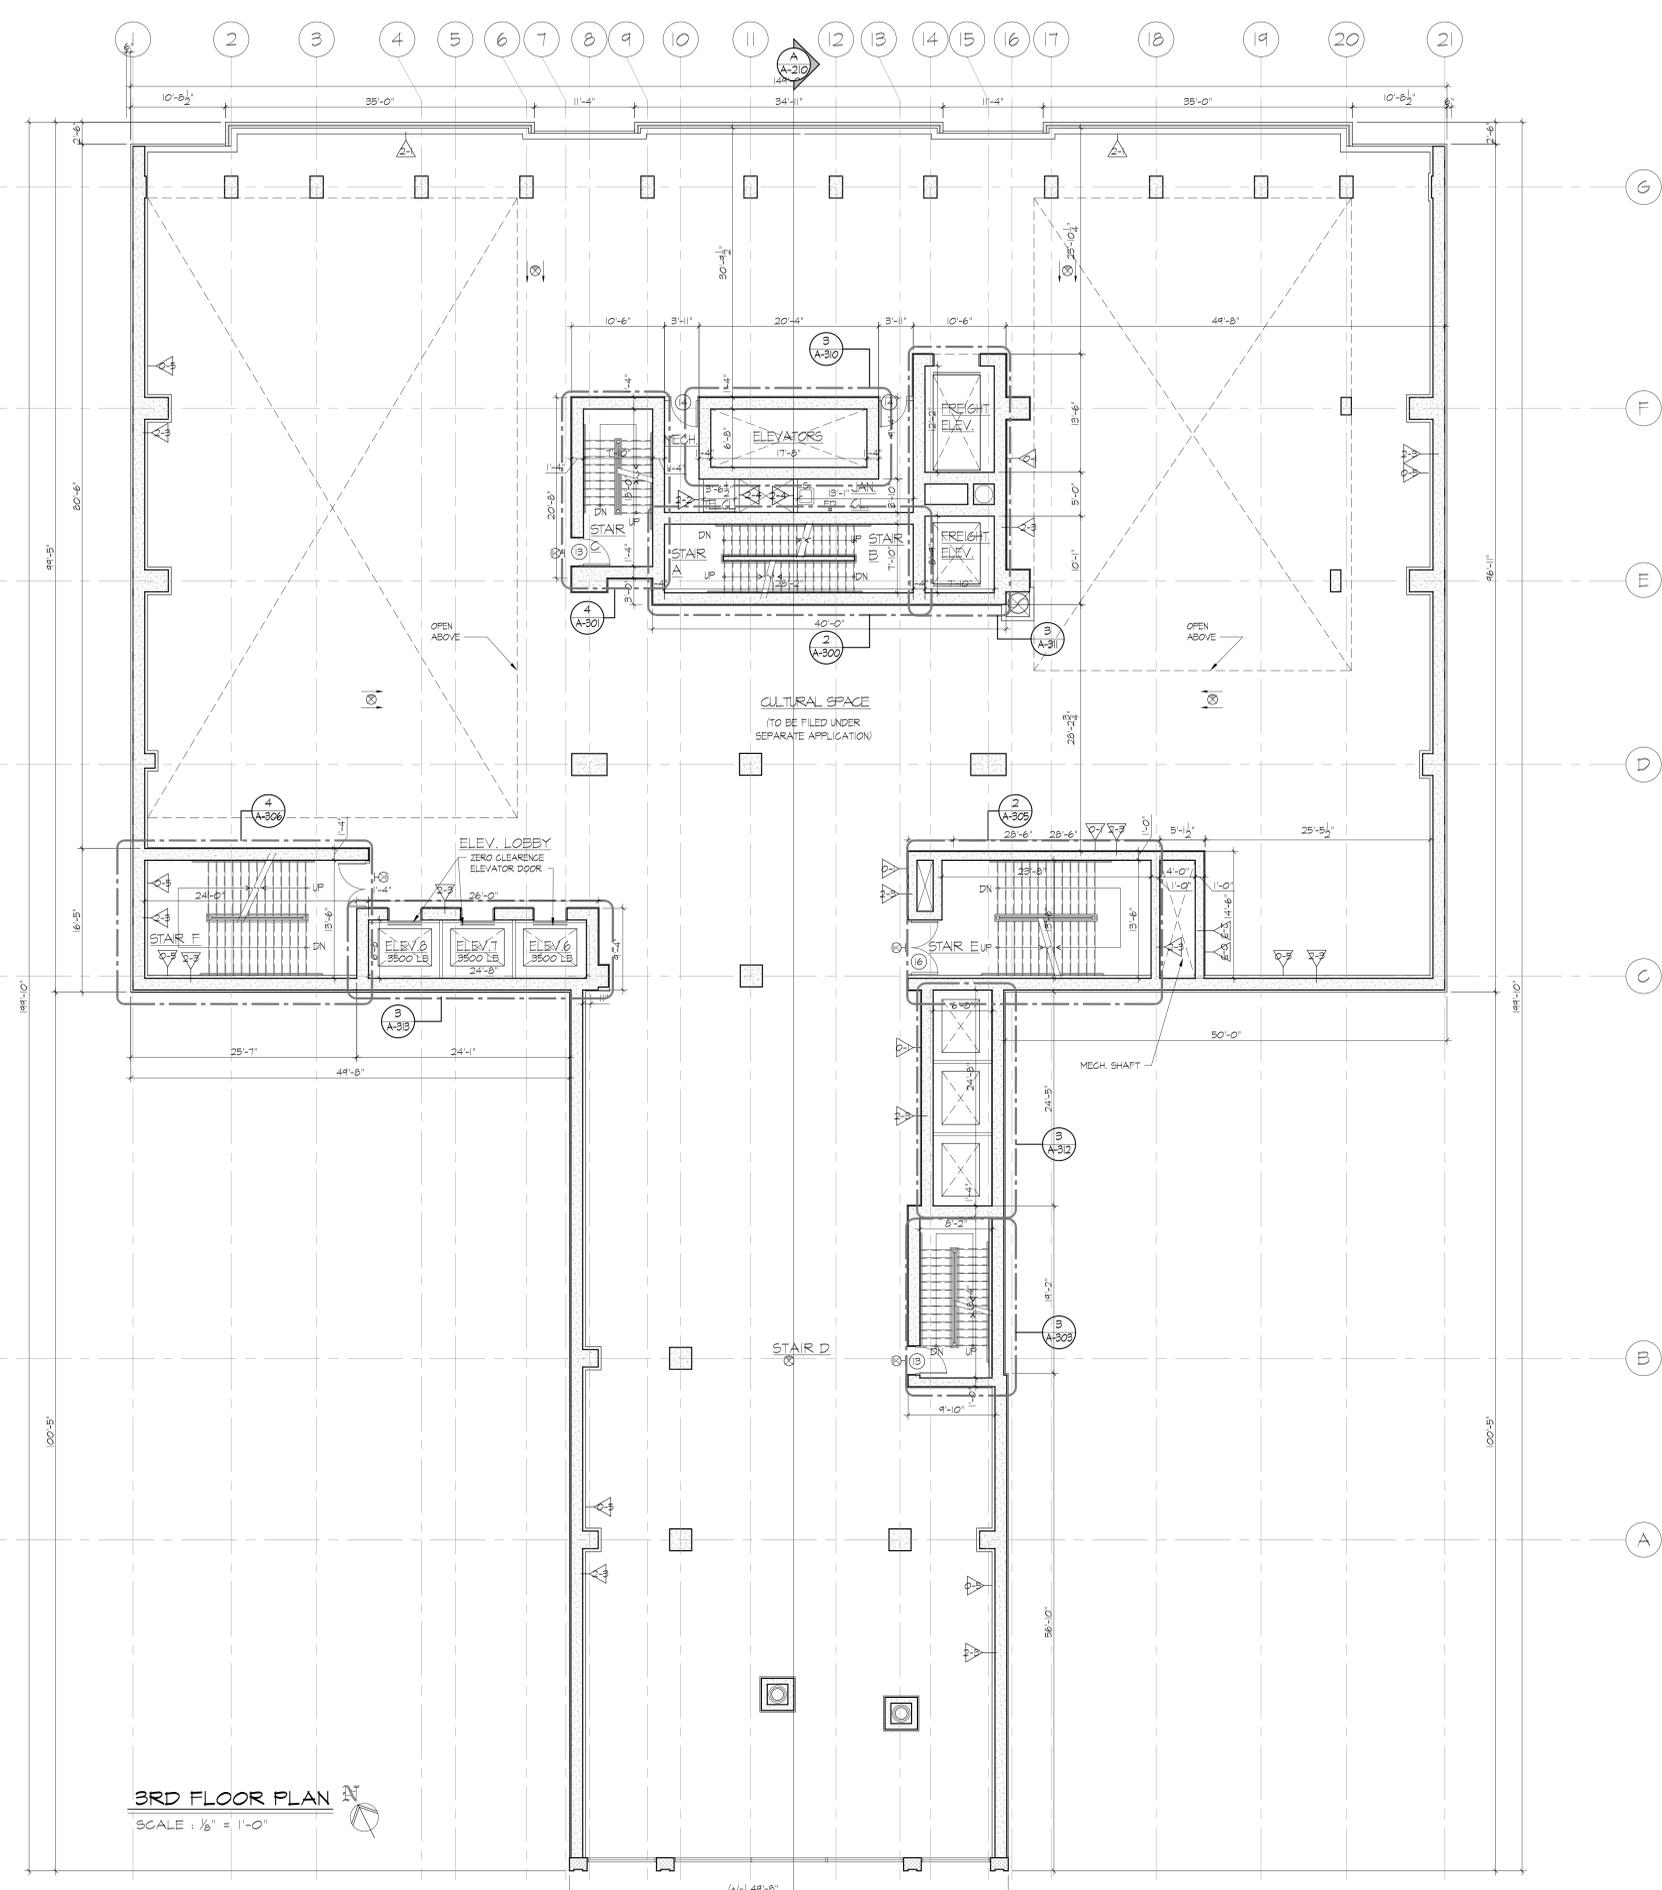

3RD FLOOR PLAN
SCALE: 1/8" = 1'-0"

EXISTING